

JUKO LUX

smarter light. better performance.

Installation Accessories for
AFX luminaires.

790344 Standard Bracket (Adjustable max. -45° — $+45^{\circ}$)

The recommended installation angles are -30° to $+30^{\circ}$ with standard bracket.



The maximum angle is approximately 45° .

Ceiling installation for AFX -luminaires.

790344 Vakiosanka (Säädettävissä maks. -45° — $+45^{\circ}$)

Suositeltavat asennuskulmat vakiosangalla ovat -30° — $+30^{\circ}$.
Suurin säädettävä kulma on noin 45° .

Kattokiinnitys AFX-valaisimille.

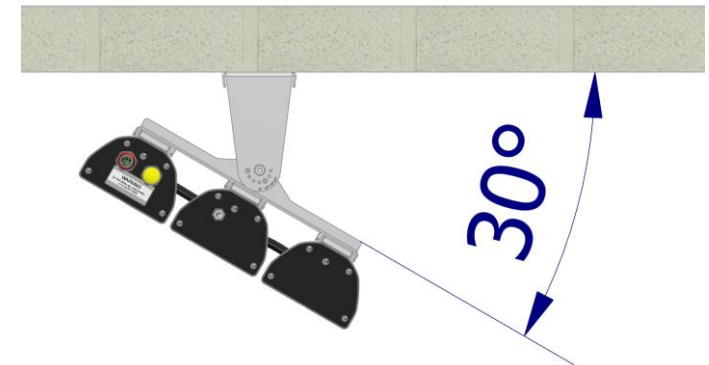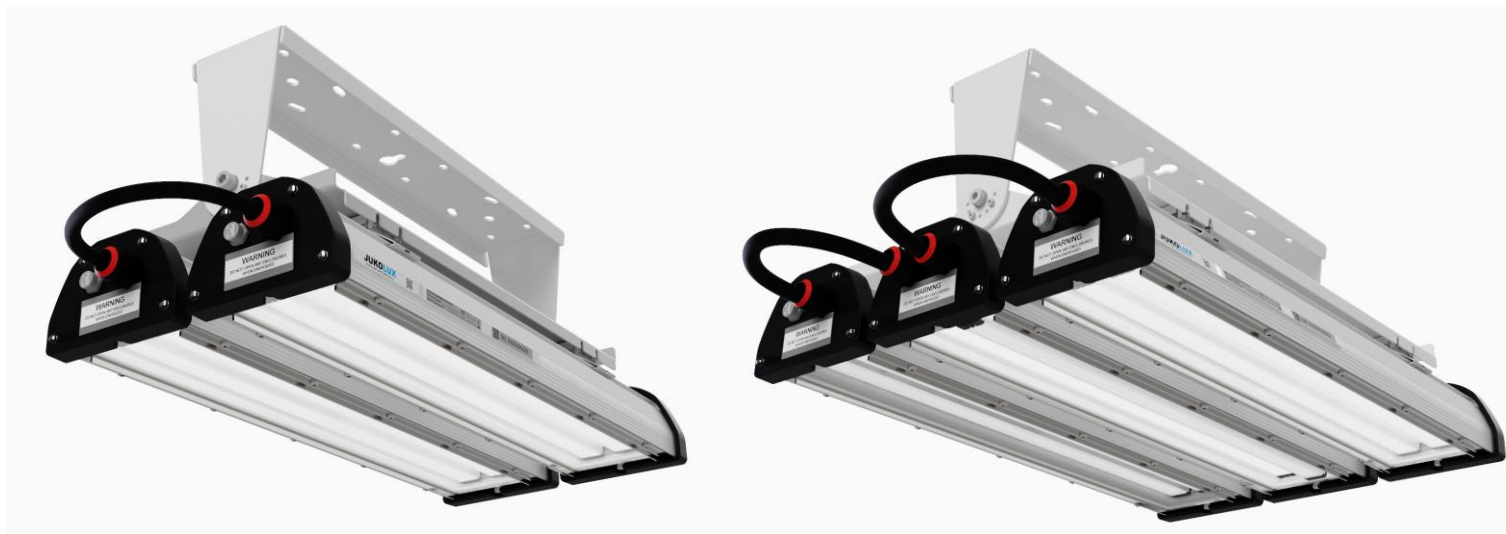


Ceiling installation examples for AFX -luminaires.

790347 Wall Bracket (Adjustable)

The maximum preferred angle is 45°.


Wall installation for AFX -luminaires.

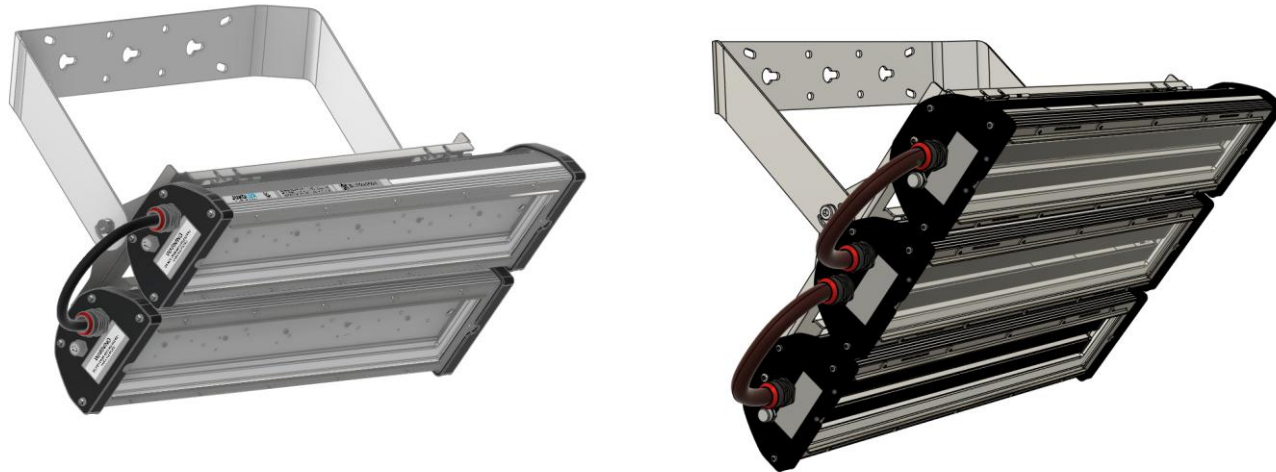

790347 Seinäkiinnike (Säädettävä)

Suurin suositeltu asennus kulma on 45°.

Seinäasennus AFX-valaisimille.

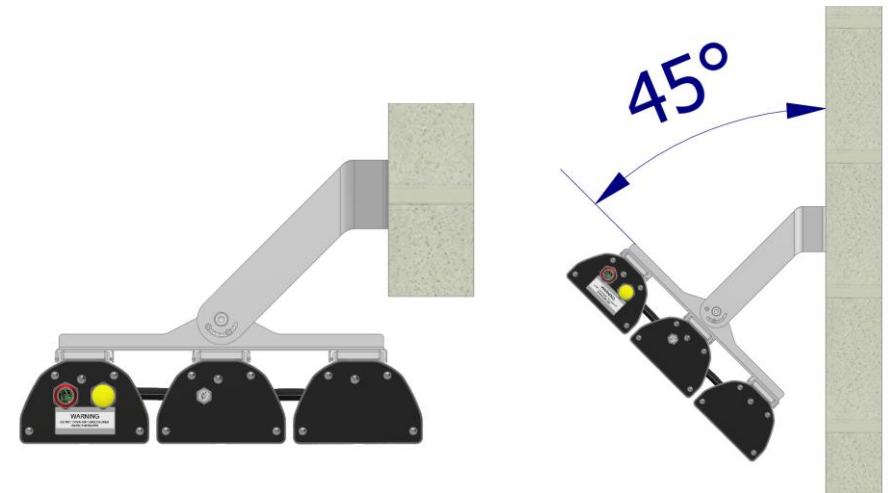


Installation examples for AFX -luminaires.

Lifting Eyenut Installation Set for AFX-06 luminaires. Includes bolts and washers.

780217 LIFTING EYENUT INSTALLATION SET M10, A4 -> STAINLESS STEEL
OPTION

780317 LIFTING EYENUT INSTALLATION SET M10, Zn -> GALVANIZED
OPTION

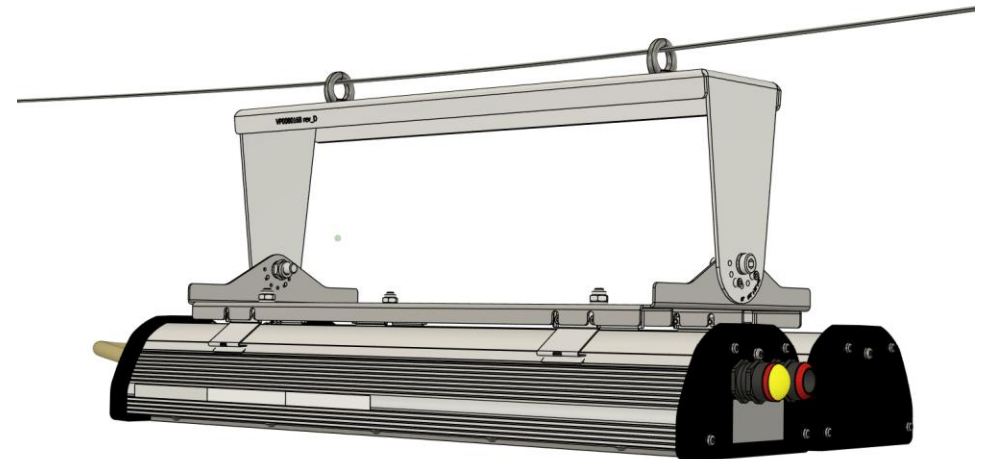

Installation example.


U-bolt set for AFX-06 luminaires. Includes nuts and washers.

780215 U-bolt DIN 3570 A4 A46 DN 32 M8 SET

-> STAINLESS STEEL OPTION

790215 U-bolt DIN 3570 Zn DN 32 M8 SET, Zn

-> GALVANIZED OPTION

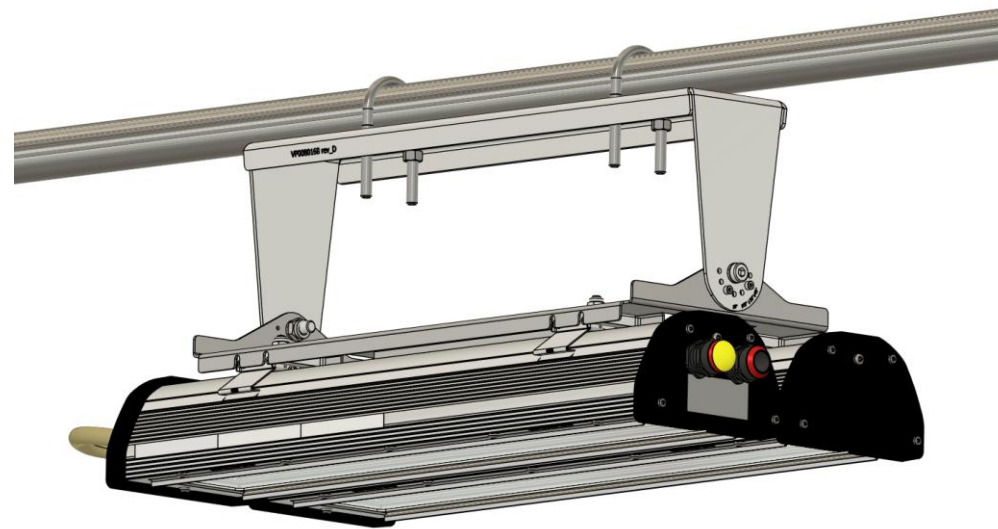

Installation example.