


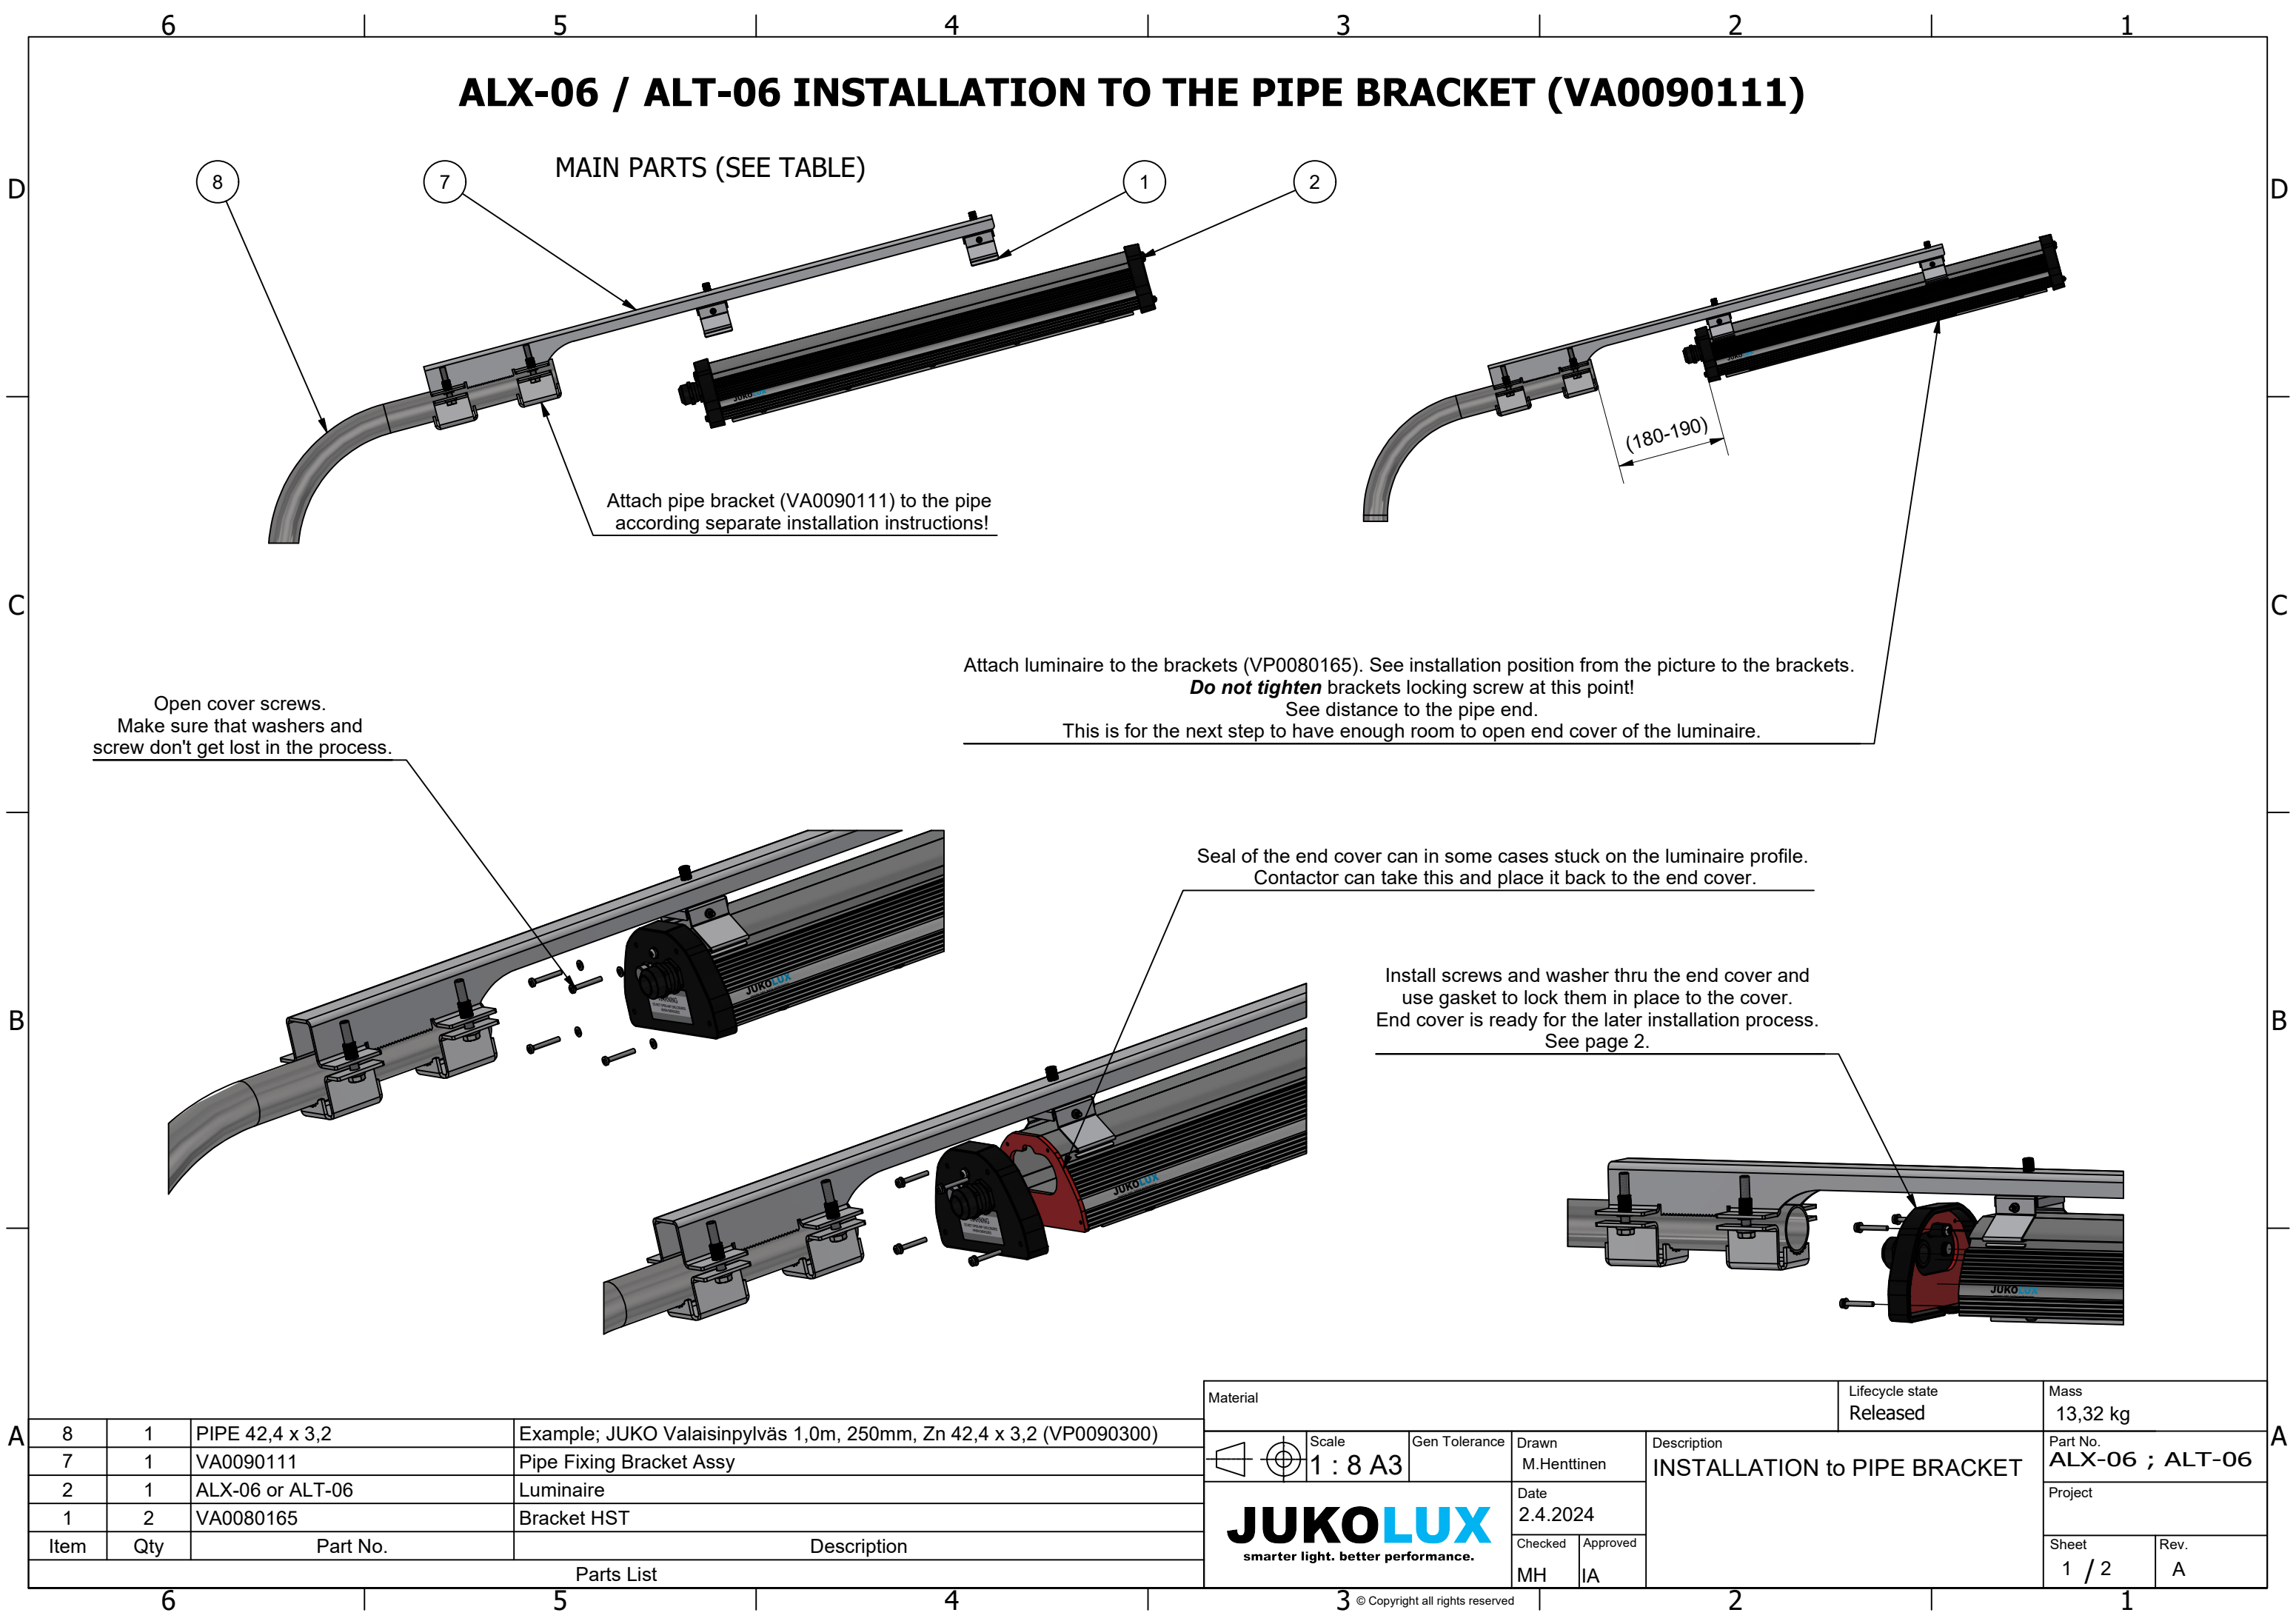

ALX-06 / ALT-06 INSTALLATION TO THE PIPE BRACKET (VA0090111)

MAIN PARTS (SEE TABLE)

Attach pipe bracket (VA0090111) to the pipe according separate installation instructions!

Attach luminaire to the brackets (VP0080165). See installation position from the picture to the brackets.
Do not tighten brackets locking screw at this point!
See distance to the pipe end.
This is for the next step to have enough room to open end cover of the luminaire.

Open cover screws.
Make sure that washers and screw don't get lost in the process.


Seal of the end cover can in some cases stuck on the luminaire profile.
Contactor can take this and place it back to the end cover.

Install screws and washer thru the end cover and use gasket to lock them in place to the cover.
End cover is ready for the later installation process.
See page 2.

Material				Lifecycle state		Mass	
				Released		13,32 kg	
Scale 1 : 8 A3				Gen Tolerance		Description	
JUKOLUX smarter light. better performance.				Drawn M.Henttinen		INSTALLATION to PIPE BRACKET	
				Date 2.4.2024		Part No. ALX-06 ; ALT-06	
				Checked MH		Project	
				Approved IA		Sheet 1 / 2	
						Rev. A	

8	1	PIPE 42,4 x 3,2	Example; JUKO Valaisinpylväs 1,0m, 250mm, Zn 42,4 x 3,2 (VP0090300)
7	1	VA0090111	Pipe Fixing Bracket Assy
2	1	ALX-06 or ALT-06	Luminaire
1	2	VA0080165	Bracket HST
Item	Qty	Part No.	Description
Parts List			

This Drawing is the property of Jukolux Oy and shall neither be copied, shown nor communicated to a third party without the consent of the owner.

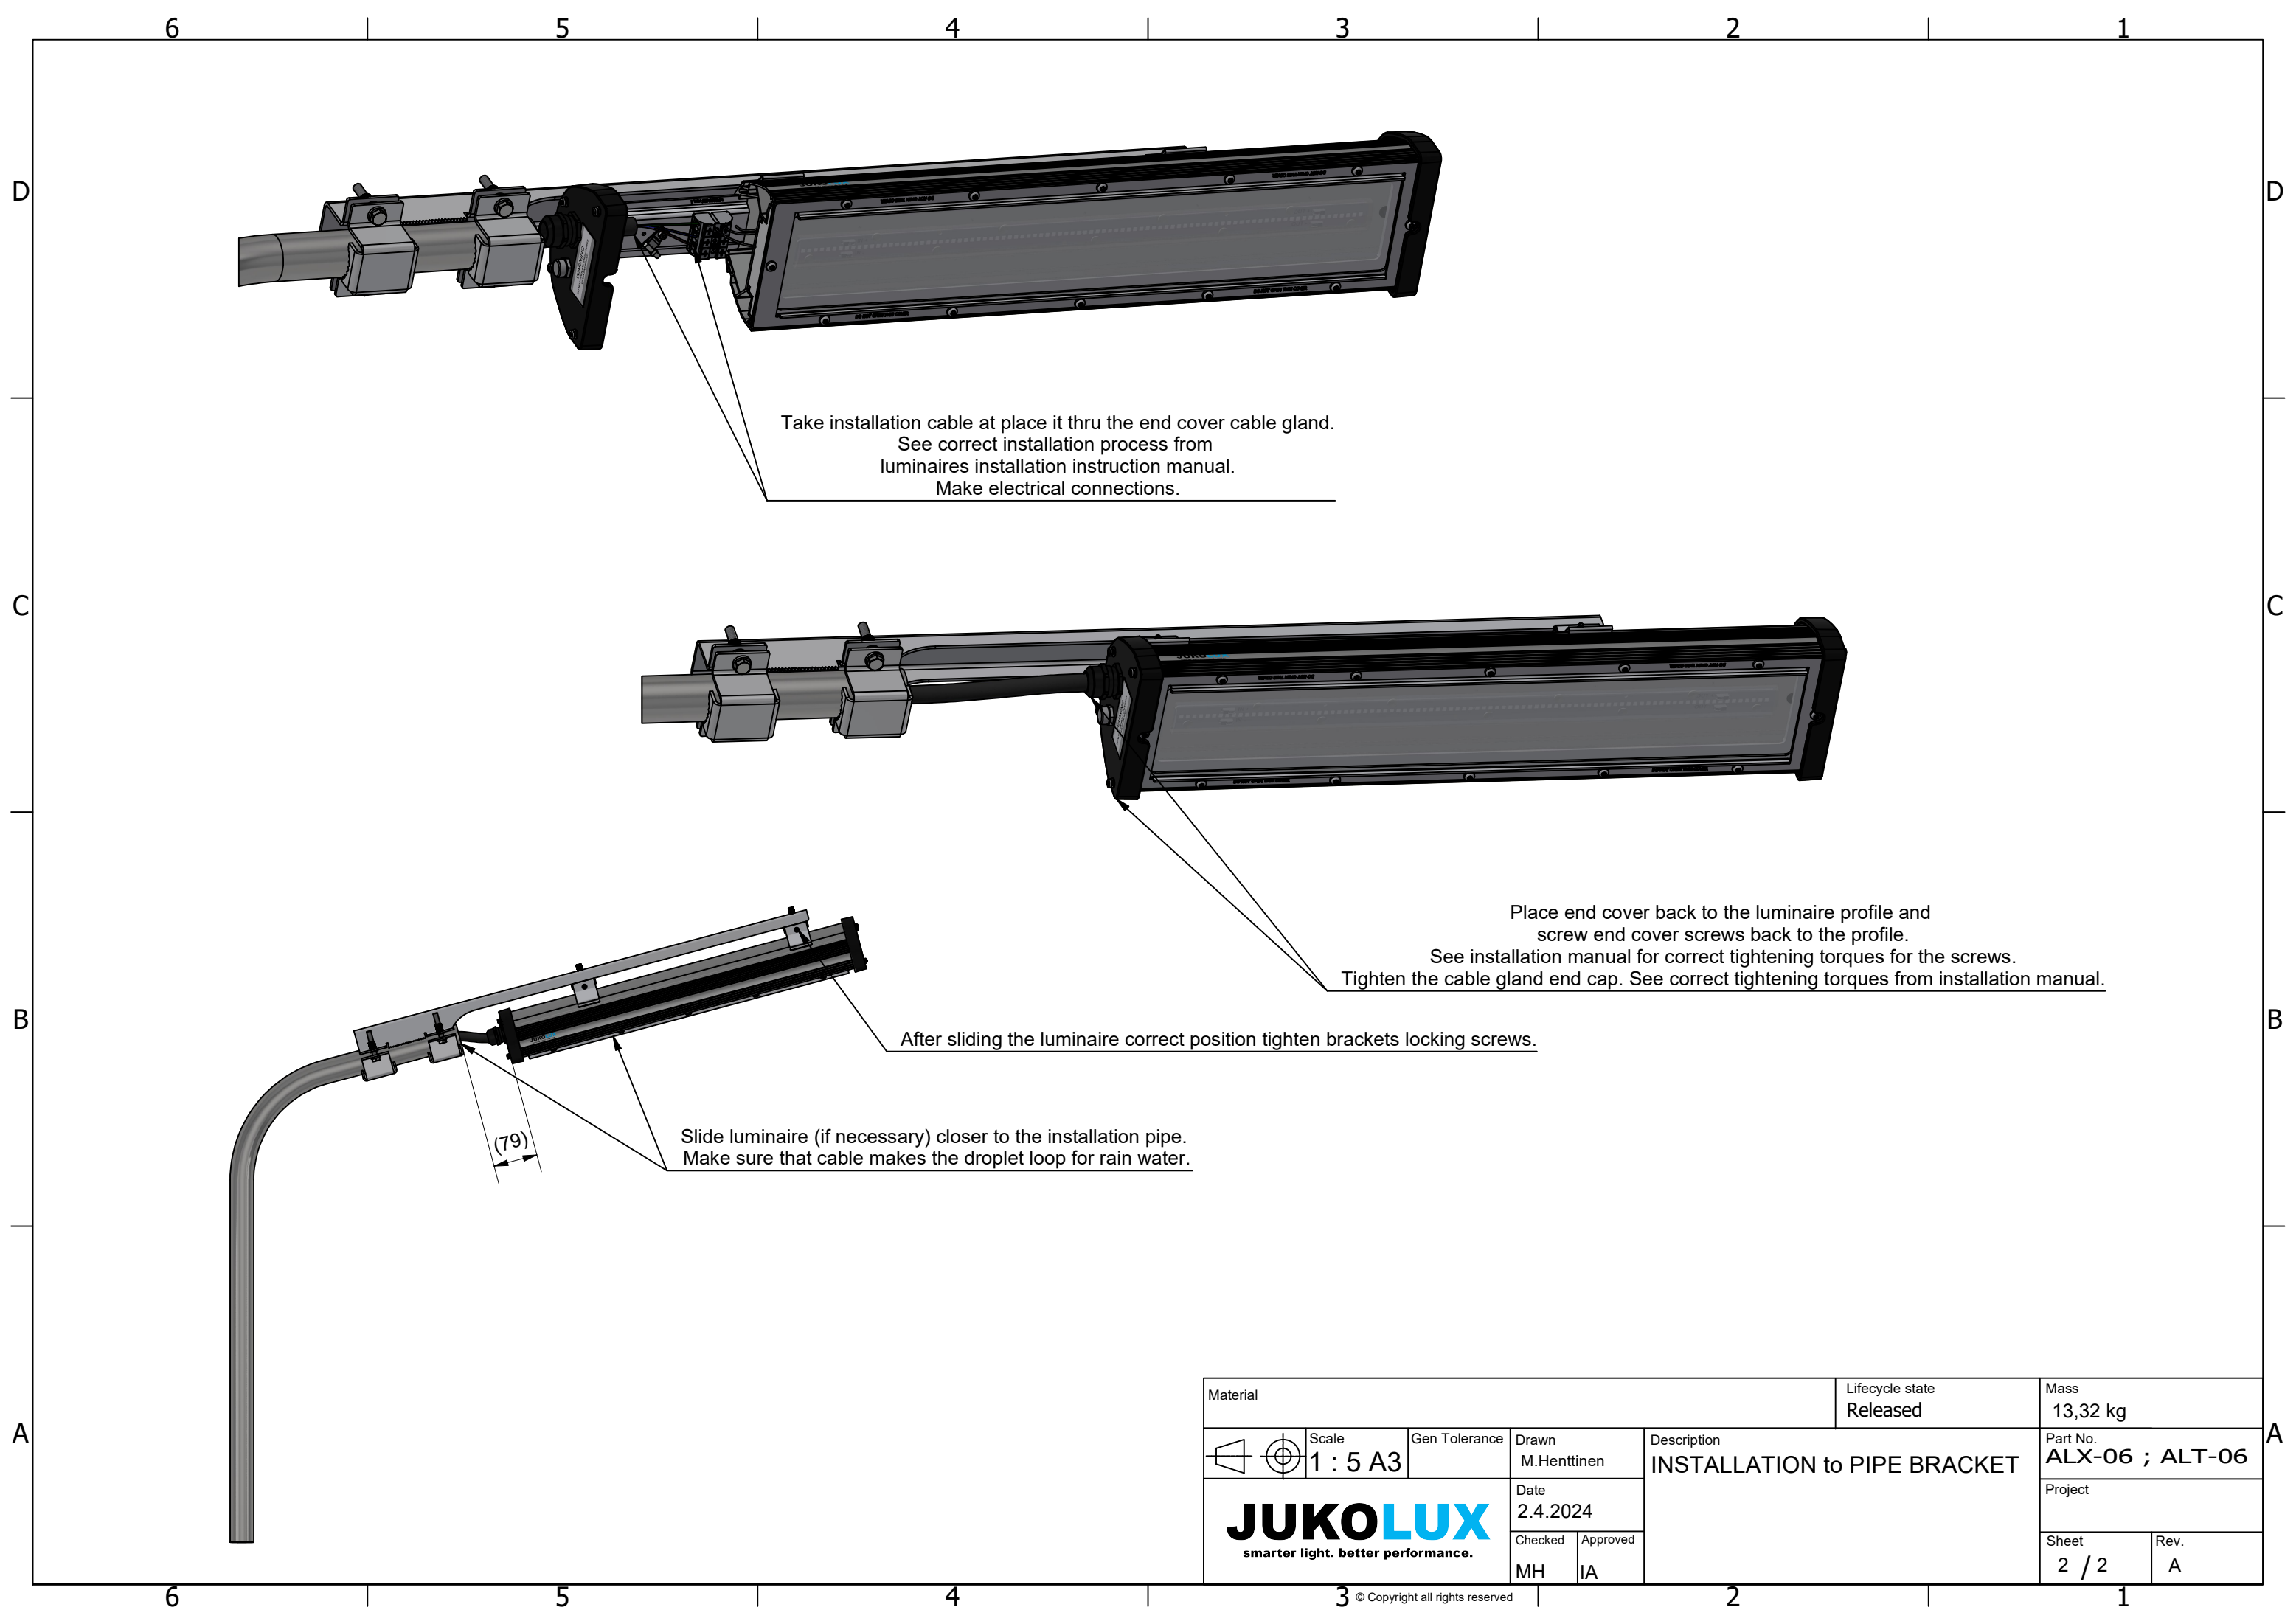

Take installation cable at place it thru the end cover cable gland.
See correct installation process from
luminaires installation instruction manual.
Make electrical connections.

Place end cover back to the luminaire profile and
screw end cover screws back to the profile.
See installation manual for correct tightening torques for the screws.
Tighten the cable gland end cap. See correct tightening torques from installation manual.

After sliding the luminaire correct position tighten brackets locking screws.

Slide luminaire (if necessary) closer to the installation pipe.
Make sure that cable makes the droplet loop for rain water.

(79)

Material					Lifecycle state Released		Mass 13,32 kg		
		Scale 1 : 5 A3	Gen Tolerance	Drawn M.Henttinen		Description INSTALLATION to PIPE BRACKET		Part No. ALX-06 ; ALT-06	
				Date 2.4.2024				Project	
				Checked MH	Approved IA			Sheet 2 / 2	Rev. A